




6-step ladder with Ezy-Lock casters shown.



General-purpose perforated tread is for use indoors.



Square tube construction is 40% stronger than round tube; for heavy-duty applications.



Non-slip Grip Strut tread is ideal for outside or wet areas.



60° standard slope has a shorter base length to fit into small spaces.

5-step and higher unassembled ladders are shipped in protective crating.



60° Standard Slope Ladders

- Square tube construction
- 60° standard slope
- Perforated or Grip-Strut® tread
- Unassembled
- 400-lb. capacity

7"D steps. 30" top handrail. Oversize top platforms available in depths of 21", 28", and 35". All-welded versions of ladders available upon request. Made in USA. Specify tread: (01) perforated, (02) Grip-Strut®.

2- to 4-Step Ladders. Feature 3" spring-loaded casters.


Step Qty.**	Top Step Height	Overall Height	20"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS WITHOUT HANDRAILS								
2	20"	20"	22x25"	73001-T*	28x25"	73010-T*	34x25"	73019-T*
3	30"	30"	22x34"	73003-T	28x34"	73012-T	34x34"	73020-T
4	40"	40"	22x44"	73005-T	28x44"	73014-T	34x44"	73022-T
LADDERS INCLUDING HANDRAILS								
2	20"	56"	22x25"	73002-T	28x25"	73011-T	34x25"	73580-T
3	30"	66"	22x34"	73004-T	28x34"	73013-T	34x34"	73021-T
4	40"	76"	22x44"	73006-T	28x44"	73015-T	34x44"	73023-T

**No. of steps includes top platform.


*Ships via small package carrier, 2 & 3 step w/o handrail completely assembled. 3 step w/handrails ship unassembled.

5- to 12-Step Ladders. Includes Ezy-Lock with 4" casters.


Step Qty.	Top Step Height	Overall Height	20"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS INCLUDING HANDRAILS								
5	50"	86"	24x43"	73007-T	31x43"	73016-T	37x43"	73178-T
6	60"	96"	25x50"	73008-T	32x50"	73017-T	38x50"	73179-T
7	70"	106"	27x57"	73009-T	33x57"	73018-T	39x57"	73180-T
8	80"	117"	—	—	32x63"	73301-T	38x63"	73318-T
9	90"	127"	—	—	33x70"	73302-T	39x70"	73319-T
10	100"	137"	—	—	34x76"	73303-T	40x76"	73320-T
11	110"	147"	—	—	36x83"	73304-T	41x83"	73321-T
12	120"	157"	—	—	37x90"	73305-T	42x90"	73322-T




General-purpose perforated tread is for use indoors.



Square tube construction is 40% stronger than round tube; for heavy-duty applications.




Non-slip Grip Strut tread is ideal for outside or wet areas.



60° standard slope has a shorter base length to fit into small spaces.

5-step and higher unassembled ladders are shipped in protective crating.

Cap. Lbs.
300  500



60° Standard Slope Ladders

- Square tube construction
- 60° standard slope
- Perforated or Grip-Strut® tread
- Unassembled
- 350-lb. capacity

Tapered base construction provides greater stability and even wearability of the wheels. Front legs are reinforced using 1/2" pipe. Rubber tipped feet are steel reinforced. Custom-made ladders are available upon request. Oversized top platforms are available in 21" or 28" depths. Durable enamel finish. Made in USA. Specify tread: (03) Perforated, (04) Grip-Strut.

2- to 5- Step Ladders. Retractable spring-loaded casters. Ship all-welded at no additional freight cost.

Step Qty.**	Top Step Height	Overall Height	18"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall Height	Stock Number
LADDERS WITHOUT HANDRAILS								
2	20"	20"	22x24"	39300-V	28x24"	39309-V	32x24"	39326-V
3	30"	30"	22x28"	39302-V	28x28"	39311-V	32x28"	39327-V
4	40"	40"	22x36"	39304-V	30x36"	39313-V	32x36"	39333-V
LADDERS INCLUDING HANDRAILS								
2	20"	44"	22x24"	39301-V	28x24"	39310-V	32x24"	39370-V
3	30"	54"	22x28"	39303-V	28x28"	39312-V	32x28"	39328-V
4	40"	70"	22x36"	39305-V	30x36"	39314-V	32x36"	39334-V
5	50"	80"	22x43"	39306-V	30x44"	39315-V	32x43"	39335-V

6- to 12-Step Ladders.

Casters release by stepping on the first step. Ship unassembled as all-welded steel components.


Step Qty.**	Top Step Height	Overall Height	18"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS INCLUDING HANDRAILS								
6	60"	93"	22x55"	39307-U	30x52"	39316-V	32x40"	39336-U
7	70"	103"	22x68"	39308-U	30x60"	39325-U	32x55"	39345-U
8	80"	113"	—	—	32x68"	39346-U	34x61"	39355-U
9	90"	123"	—	—	32x76"	39347-U	34x67"	39356-U
10	100"	133"	—	—	32x84"	39348-U	34x73"	39357-U
11	110"	144"	—	—	32x92"	39349-U	34x89"	39358-U
12	120"	150"	—	—	32x100"	39350-U	34x95"	39359-U

*Ship via small package carrier.

**Step Qty. includes top platform. 2, 3, & 4 step (without handrails) shipped fully assembled.

Ships same day for
1-3 day delivery

Ships 1-5 days

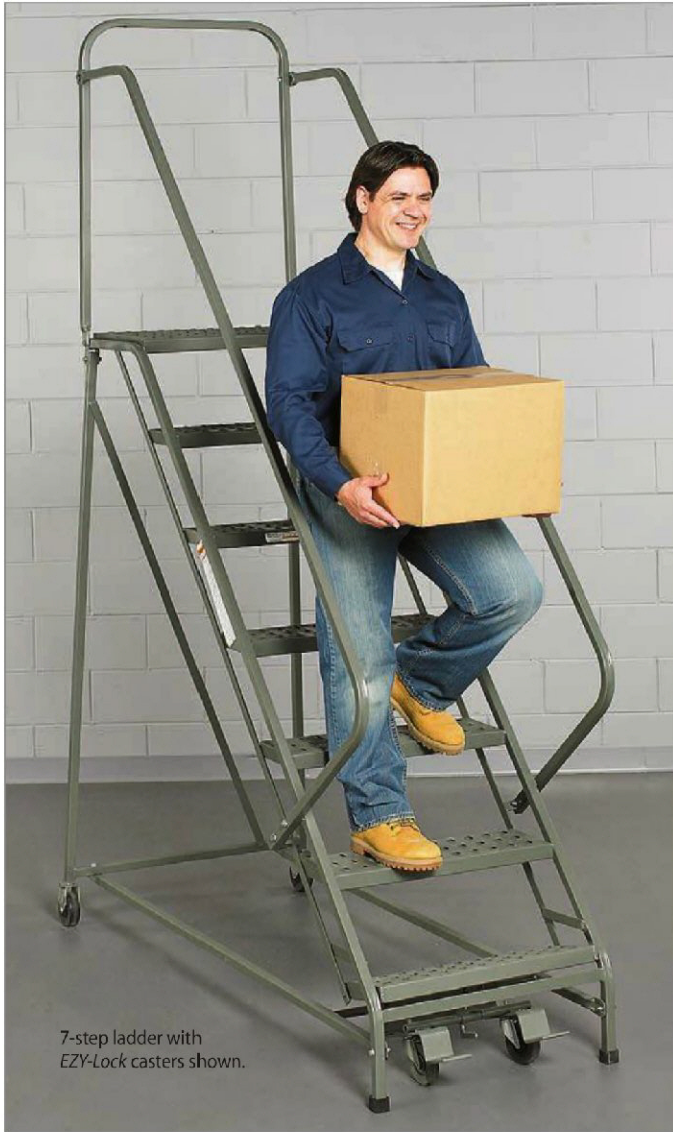


7-step ladder with EZY-Lock casters shown.




General-purpose perforated tread is for use indoors.



Square tube construction is 40% stronger than round tube; for heavy-duty applications.



Non-slip Grip Strut tread is ideal for outside or wet areas.



50° stairway slope allows user to descend facing forward; compliant with ANSI codes.

5-step and higher unassembled ladders are shipped in protective crating.



50° Stairway Slope Ladders

- Square tube construction
- 50° stairway slope
- Perforated or Grip-Strut® tread
- Unassembled
- 400-lb. capacity


Pyramid design provides greater safety and stability. Ideal for order-picking or warehousing activities that require frequent use. 7" deep steps. Made in USA. Specify tread: (01) non-slip perforated steps for general use, (02) Grip-Strut.

2- to 4-Step Ladders. Include 3" spring-loaded casters.


Step Qty.	Overall Height	Top Step Height	20"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS WITHOUT HANDRAILS								
2	20"	20"	22x25"	73868-T	28x25"	73877-T	34x25"	73878-T
3	30"	30"	22x34"	73885-T	28x34"	73886-T	34x34"	73887-T
4	40"	40"	22x44"	73891-T	28x44"	73892-T	34x44"	73893-T
LADDERS INCLUDING HANDRAILS								
2	56"	20"	22x25"	73880-T	28x25"	73881-T	34x25"	73884-T
3	66"	30"	22x34"	73888-T	28x34"	73889-T	34x34"	73890-T
4	76"	40"	22x44"	73894-T	28x44"	73895-T	34x44"	73896-T

5- to 10-Step Ladders. Feature 4" Ezy-Lock casters.


Step Qty.	Overall Height	Top Step Height	20"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS INCLUDING HANDRAILS								
5	86"	50"	22x54"	73897-T	29x54"	73898-T	34x54"	73900-T
6	96"	60"	26x60"	73901-T	30x63"	73902-T	35x63"	73903-T
7	106"	70"	24x72"	73904-T	31x72"	73905-T	37x72"	73906-T
8	116"	80"	—	—	32x81"	73907-T	38x81"	73908-T
9	126"	90"	—	—	33x91"	73909-T	39x91"	73910-T
10	136"	100"	—	—	34x100"	73911-T	40x100"	73912-T




General-purpose perforated tread is for use indoors.



Non-slip Grip-Strut tread is ideal for outside or wet areas.



Round tube construction.



50° stairway slope allows user to descend facing forward; compliant with ANSI codes.

Cap. Lbs.

400

300 ——— 500

5-step and higher unassembled ladders are shipped in protective crating.



50° Stairway Slope Ladders

- Round tube construction
- 50° stairway slope
- Perforated or Grip-Strut® tread
- Unassembled
- 400-lb. capacity

7"D steps. Handrail is 24" high on 2–3-step ladders and 30" high on 4–12-step ladders. Made in USA. Specify tread: (01) perforated, (02) Grip-Strut®.



4-step ladder with spring-loaded casters.



7-step ladder with foot-activated locking device shown.

2- to 4-Step Ladders. Have spring-loaded casters that automatically retract when weight is applied.

Step Qty.	Overall Height	Top Step Height	18"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS WITHOUT HANDRAILS								
2	20"	20"	22x25"	73702-S	28x25"	73726-S	34x25"	73743-S
3	30"	30"	22x34"	73704-S	28x34"	73728-S	34x34"	73745-S
4	40"	40"	22x44"	73706-S	28x44"	73730-S	34x44"	73747-S
LADDERS INCLUDING HANDRAILS								
2	56"	20"	22x25"	73703-S	28x25"	73727-S	34x25"	73744-S
3	66"	30"	22x34"	73705-S	28x34"	73729-S	34x34"	73746-S
4	76"	40"	22x44"	73708-S	28x44"	73731-S	34x44"	73748-S

5- to 12-Step Ladders. Include foot-activated caster lo


Step Qty.	Overall Height	Top Step Height	18"Wx14"D TOP STEP		26"Wx14"D TOP STEP		32"Wx14"D TOP STEP	
			Overall WxD	Stock Number	Overall WxD	Stock Number	Overall WxD	Stock Number
LADDERS INCLUDING HANDRAILS								
5	86"	50"	24x54"	73712-S	31x54"	73732-S	37x54"	73749-S
6	96"	60"	25x63"	73724-S	32x63"	73733-S	38x63"	73750-S
7	106"	70"	27x72"	73725-S	33x72"	73741-S	39x72"	73751-S
8	116"	80"	—	—	32x81"	73752-S	38x81"	73778-S
9	126"	90"	—	—	33x91"	73753-S	39x91"	73779-S
10	136"	100"	—	—	34x100"	73754-S	40x100"	73780-S
11	146"	110"	—	—	36x109"	73776-S	41x109"	73786-S
12	162"	120"	—	—	37x118"	73777-S	42x118"	73787-S

NOTE: Step Qty. includes top platform.


Ships same day for 1-3 day delivery

Ships 1-5 days

Dock Equipment | LADDERS



General-purpose perforated tread is for use indoors.




Non-slip Grip Strut tread is ideal for outside or wet areas.




Round tube construction.



60° standard slope has a shorter base length to fit into small spaces.



50° stairway slope allows user to descend facing forward; compliant with ANSI codes.

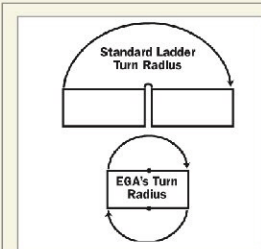

All ladders on this page are shipped in protective crating.



Now, even large rolling ladders maneuver easily in confined areas!



Radius 360° Rotating Rolling Ladders

- Round tube construction
- 50° stairway and 60° standard slope
- Perforated or Grip-Strut tread
- Unassembled
- 400-lb. capacity

360° rotation design allows ladder to turn in its own radius and still track in a straight line. Equipped with two 5" rigid casters in the middle and two 4" swivel casters in the rear. Legs have 2 1/2" diameter rubber pads. All ladders include handrails. 7"D steps and 14"D top step. Made in USA.

Step Qty.	Overall Height	Top Step Height	60° STANDARD SLOPE			50° STAIRWAY SLOPE		
			Overall WxD	PERFORATED Stock No.	GRIP-STRUT Stock No.	Overall WxD	PERFORATED Stock No.	GRIP-STRUT Stock No.
26"Wx14"D TOP STEP								
7	106"	70"	31x57"	3926605-S	3926606-S	31x82"	3926607-S	3926608-S
8	116"	80"	33x63"	3926705-S	3926706-S	33x81"	3926707-S	3926708-S
9	126"	90"	34x70"	3926805-S	3926806-S	34x91"	3926807-S	3926808-S
10	136"	100"	35x76"	3926905-S	3926906-S	35x100"	3926907-S	3926908-S
11	146"	110"	36x83"	3927005-S	3927006-S	36x109"	3927007-S	3927008-S
12	162"	120"	37x90"	3927105-S	3927106-S	37x118"	3927107-S	3927108-S
13	172"	130"	38x96"	3927205-S	3927206-S	—	—	—
14	182"	140"	39x103"	3927305-S	3927306-S	—	—	—
15	192"	150"	40x109"	3927405-S	3927406-S	—	—	—
16	202"	160"	42x116"	3927505-S	3927506-S	—	—	—
26"Wx14"D TOP STEP								
7	106"	70"	37x57"	3927605-S	3927606-S	37x82"	3927607-S	3927608-S
8	116"	80"	38x63"	3927705-S	3927706-S	38x81"	3927707-S	3927708-S
9	126"	90"	39x70"	3927805-S	3927806-S	39x91"	3927807-S	3927808-S
10	136"	100"	40x76"	3927905-S	3927906-S	40x100"	3927907-S	3927908-S
11	146"	110"	41x83"	3928005-S	3928006-S	41x109"	3928007-S	3928008-S
12	162"	120"	42x90"	3928105-S	3928106-S	42x118"	3928107-S	3928108-S
13	172"	130"	43x96"	3928205-S	3928206-S	—	—	—
14	182"	140"	44x103"	3928305-S	3928306-S	—	—	—
15	192"	150"	46x109"	3928405-S	3928406-S	—	—	—
16	202"	160"	47x116"	3928505-S	3928506-S	—	—	—