




Versa-King™ Modular Offices

- For indoor use
- Available in beige interior/exterior
- Ships unassembled

Wall panels match structural framing material to create a smooth, finished appearance. Laminated wall panels include a polystyrene core for up to R-13 insulation rating and superior sound reduction. Posts include snap-on cover plates for easy access. Made in USA. **FACTORY QUICK SHIP.**

Accessories pictured: windows and window in door.



Panel connecting posts double as a wiring chase to conceal electrical service between wall panels. Posts include snap-on cover plates for easy access.

Accessories

- 3979000-S Beige painted steel door (in lieu of wood door).
- 3979100-S Additional beige painted steel door.
- 4298200-S Window in door, 1/8" tempered.
- 4299000-S 3/16" Safety glass tempered window (42"Hx44"W).
- 4298700-S* Heat-cool combination units, 230V, (12M-C/10.5 M-H BTU).
- 4298800-S Louver (in wall or door—specify location).
- 4298900-S Air conditioning cut-out (Specify: size and location).

*To determine how many heat-cool combination units are needed, multiply length x width x 30 = BTU Requirements.

Modular Offices

Overall WxD	Overall Height	Electrical Kit Fixture Qty.	Electrical Kit Outlet Qty.	Stock Number
8x8'	8'	1	2	3975001-S
10x8'	8'	2	2	3975101-S
12x8'	8'	2	3	3975201-S
10x10'	8'	2	3	3975301-S
12x10'	8'	3	3	3975401-S
12x12'	8'	3	3	3975501-S
16x10'	8'	4	4	3975601-S
16x12'	8'	4	4	3975701-S
20x12'	8'	5	5	3975801-S
20x10'	8'	4	5	3975901-S
24x12'	8'	6	6	3976001-S
28x12'	8'	7	6	3976101-S
32x12'	8'	8	8	3976201-S
16x16'	8'	5	5	3976301-S
20x16'	8'	7	5	3976401-S

Base Price Includes: 22-gauge steel ribbed roof deck; vinyl faced swing door with cylindrical key-in-knob lockset (specify inside or outside right or left hand swing); lay-in acoustical ceiling system; connecting hardware and framing; detailed instructions including custom floor-plan layout drawing and parts list.

Electric Kit Includes: vertical raceways with snap-on cover plates; outlets as specified, including handy box and cover plate; T-8 light fixtures as specified; load center with breakers—100 amp capacity. NOTE: Wiring, and conduit for outlets and light fixtures and light bulbs not included.

NOTE: Please include drawing with order, showing location of doors, windows, electrical.



Fully Assembled Interior Buildings

- For indoor use
- Available in white interior/exterior
- Ships set up

Pre-wired panels are constructed of vinyl covered hardboard interior and exterior surfaces. Solid 3" thick walls provide superior sound reduction and thermal control. Forkliftable floor. Custom surfaces are available, call for pricing. Made in USA.

Overall WxD	Overall Height	Electrical Kit Fixture Qty.	Electrical Kit Outlet Qty.	Stock Number
8x8'	8'	1	2	3978500-S
10x8'	8'	2	2	3978600-S
12x8'	8'	2	3	3978700-S
12x10'	8'	3	3	3978800-S

NOTE: Windows are not included.

50% faster set-up than any competitive structure without special tools or training!



Fire retardant drywall construction available on all buildings. Please call for quote.



Shown: gray exterior, gray interior.

Accessories pictured: window in door, windows. Light oak door available, call to order.



Building System

- For indoor use
- Available in 6 colors
- Ships unassembled

All panels are completely framed in anodized aluminum extrusions that pivot and lock together for connection without mechanical fasteners. Doors ship pre-hung with butt-hinges and key-in knob lockset ships separately. 3" insulated walls for excellent sound reduction and good thermal control. Panels have expanded polystyrene board core (UL class 1) with 1/8" vinyl-covered hardboard laminated to each side. Complete system includes electrical kit. Made in USA.

Buildings

Specify interior color: (18) blue, (22) beige, (26) gray, (30) white, (34) walnut, (38) pecan.
Specify exterior color: (18) blue, (22) beige, (26) gray, (30) white, (34) walnut, (38) pecan.

Overall WxD	Overall Height	Electrical Kit Fixture Qty.	Electrical Kit Outlet Qty.	1 1/4" THICK WALLS— R-7 INSULATION VALUE, 19 dBA NOISE REDUCTION		3" THICK WALLS— R-13 INSULATION VALUE, 30 dBA NOISE REDUCTION	
				Stock No.	Stock No.	Stock No.	Stock No.
8x8'	8'	1	2	42821-S	42341-S		
10x8'	8'	2	2	42822-S	42342-S		
12x8'	8'	2	3	42823-S	42343-S		
10x10'	8'	2	3	42824-S	42344-S		
12x10'	8'	3	3	42825-S	42345-S		
12x12'	8'	3	3	42826-S	42346-S		
16x10'	8'	4	4	42827-S	42347-S		
16x12'	8'	4	4	42828-S	42348-S		
20x12'	8'	5	5	42829-S	42349-S		
20x10'	8'	4	5	42830-S	42350-S		
24x12'	8'	6	6	42831-S	42351-S		
28x12'	8'	7	6	42832-S	42352-S		
32x12'	8'	8	8	42833-S	42353-S		
16x16'	8'	5	5	42834-S	42354-S		
20x16'	8'	7	5	42835-S	42355-S		

NOTE: Please include drawing with order, showing location of doors, windows, electrical.

Accessories.

- 4298200-S Window in door, 1/8" tempered.
- 4298100-S (1 1/4" thick walls) Extra door 3'x6 1/2'x1 1/2".
- 4298000-S (3" thick walls.) Extra door 3'x6 1/2'x3".
- 4299000-S 3/16" Safety glass tempered window (42"Hx44"W).
- 4298700-S Heat-cool combination units, 230V, (12M-C/10.5 M-H BTU).
- 4298900-S Air conditioning cut-out (Specify: size and location).


*To determine how many heat-cool combination units are needed, multiply length x width x 30 = BTU Requirements.

Ships same day for 1-3 day delivery

Ships 1-5 days

Available Colors:

(18) blue	(22) beige	(26) gray
(30) white	(34) walnut	(38) pecan

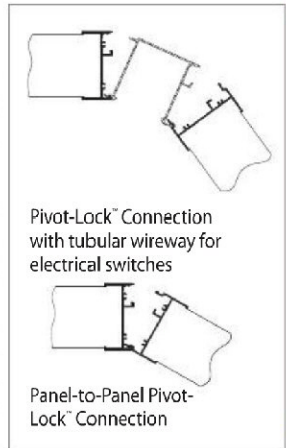

<p>Pivot-Lock™ Base Price Includes:</p> <ol style="list-style-type: none"> (1) Correct number of panels to construct sizes shown. (2) Vinyl-covered hollow core doors in walnut finish 3'x6'6"x1 1/4" with all necessary hardware included and shipped pre-hung. (3) Grid-type ceiling includes hanger tabs, tie wire, and 2x4^l lay-in acoustical board (UL Class 1). (4) Deck to serve as roof over for bldg. made up of interlocking steel panels. (5) Electric kit. (6) Complete plans for assembly. 	<p>Pivot-Lock™ Electric Kit Includes:</p> <ol style="list-style-type: none"> (1) Tubular aluminum wireways pivot and lock between wall sections for concealed electric switches with ship installed in snap-on cover plates. (2) Load center with breakers. (3) Lay-in fixtures with diffuser 2x4^l lens <p>NOTE: Wiring, conduit, and lamps are not included.</p>
---	--

Dock Equipment | OFFICES & BUILDINGS

Accessories shown: windows, window in door and door style.



Please include drawing with order, showing location of doors, windows, electrical.



Economical Prefabricated Offices

- For indoor use
- Available in white interior/exterior
- Ships unassembled

Reusable, pre-finished wall panels are highly adaptable to different work conditions and can be moved or added on to as your needs change. Strong, durable construction features rust-resistant anodized aluminum frames and posts that provide a strong, tight connection between wall panels. Vinyl covered hardboard panels are 1 1/4" thick and have an R7 insulation value, 19 dBA noise reduction to give you good sound control and insulation. The standard post connection features a narrow profile design that works well in partial or full-height partition applications. Includes acoustical grid ceiling. Windows not included, see accessories. Made in USA.

Overall WxD	Overall Height	Electrical Kit Fixture Qty.	Electrical Kit Outlet Qty.	Stock Number
8x8'	8'	1	2	3916500-S
10x8'	8'	2	2	3916600-S
12x8'	8'	2	3	3916700-S
10x10'	8'	2	3	3916800-S
12x10'	8'	3	3	3916900-S
12x12'	8'	3	3	3917000-S
16x10'	8'	4	4	3917100-S
16x12'	8'	4	4	3917200-S
20x10'	8'	4	5	3922100-S
20x12'	8'	5	5	3918300-S
24x12'	8'	6	6	3924700-S
28x12'	8'	7	6	3924800-S
32x12'	8'	8	8	3924900-S
16x16'	8'	5	5	3925000-S
20x16'	8'	7	5	3925100-S



- Base Price Includes:**
- (1) Correct number of panels to construct sizes shown.
 - (2) Full-flush 3068 hollow core wood door with key-knob cylindrical lockset shipped unassembled.
 - (3) Standard post connections to serve as structural support for walls and ceiling system.
 - (4) Post includes full height, snap-on cover to allow access for initial wiring as well as future modification or expansion.
 - (5) Corrugated steel roof deck ceiling support system. Color: gray.
 - (6) Acoustical ceiling system consisting of 1/2" mineral board tile (UL Class 1), heavy-duty grid, tie wire, and tabs.

- Electric Kit Includes:**
- (1) Light Switch
 - (2) Outlets
 - (3) 2x4' recessed light fixtures
 - (4) Properly sized load center

Accessories

- 3939300-S Extra hollow-core wood door.
- 3939400-S Window in door.
- 3939500-S 3/8" Safety glass tempered fixed window (42"Hx44"W).
- 3939800-S Heat-cool combination units, 230V, (12M-C/10.5 M-H BTU).
- 3941700-S Air conditioner cut-out (specify size, location).

