



Bishamon's Next Generation of Quality Lift Tables Shipped to You in 48 Hours!*



Experience Industry's "Best Engineered" Line of Lift Tables

Learn More at: bishamon.com/optimus

Bishamon >>> ON-DEMAND







OPTIMUS™ SPECIFICATIONS								
	L2K		L3K		L5K			
Maximum Load Capacity (lbs)	20	000	3000		5000			
Lowered Height (in)	8	1/2	8 5/8		8 3/4			
Maximum Raised Height (in)	38 1/2		42 5/8		48			
Travel (in)	30		34		39 1/4			
Platform Width (in)	28 × 48	36 x	28	36 x	32	48 × 72		
Platform Length (in)	4̂8	4̂8	48	4 8	5̂6	7 2		
Base Frame Width (in)	24 5/16		24 5/16		28 5/16			
Base Frame Length (in)	49		49		56			
Weight (lbs)	460	490	530	560	730	1030		

Design & Engineering

- Leading edge product development utilizing industry's latest advanced analysis techniques.
- Comprehensive fatigue, life-cycle and performance testing
- Designed for performance and durability with lifetime, maintenance free, composite bushings throughout
- Compliant with ANSI MH29.1:2012 "Safety Requirements for Industrial Scissor Lifts"

Safety in Mind

- Meets or exceeds required safety clearances
- Flow limiting safety valve at cylinder
- Contoured scissor legs and large torque tube maximize stiffness and stability
- Hinged maintenance bars powder coated yellow for safety
- Contoured platform corners for operator safety

Additional Features

- Unitized power unit
- Innovative features including easy-view hydraulic reservoir
- Intuitive and user friendly plug & play controls
- Clean, accessible maintenance friendly design

Optimus[™] **Options**

43" Diameter Turntable Platform Foot Operated Controls With Guard Accordion Bellows Skirting

Semi-Live Portability (L2K only)

Cart Portability With 2 Swivel and 2 Rigid Casters - adds 7" to lowered ht. (L2K & L3K only)


480 VAC Motor w/Low Voltage Controls (L3K & L5K only)



43" Diameter Turntable



Foot Control



Accordion Bellows

Bishamon ▶▶▶ ON-DEMAND

*Bishamon On-Demand Group ships in 48 hours or less!

Optimus Lifts Included are:

L2K-2848

L2K-3648

L2K-TT

L3K-2848 (115 VAC)

L3K-3648 (115 VAC)

L5K-3256 (115 VAC)

Adding options may affect delivery. Consult factory to request a copy of the On-Demand program details.

DISTRIBUTED BY:



Bishamon Industries Corporation

5651 East Francis Street Ontario, California 91761-3601

Ph: 800-358-8833 US & Canada 909-390-0055 Outside US/CN

Fax: 800-700-0492

www.bishamon.com

BIC-OPT-06-13

CompacLift

SERIES SCISSOR LIFT TABLES





Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at 800-358-8833.

Bishamon X-Series Scissor Lift Tables are rugged, compact hydraulic lifts with capacities of 440 to 1,650 lbs., travel distance up to 45 in. and platform sizes from 18 x 25.5 to 20 x 40 inches.

X Series CompacLift™ tables are most widely used in machine tool or other production line manufacturing activities requiring heavy-duty lifting and positioning within a confined area. With additional emphasis placed on ergonomics and the reduction of repetitive lifting activities by the manufacturer, The X-Series meets an ever-growing need for lifting assistance.

Basic design features a manual foot pump operation to afford the opportunity of economical solutions to lifting problems. Electric/Hydraulic and Air/Hydraulic units are also available in most capacities.

CompacLifts™ are designed and manufactured to extend the work area of machine tool activities and production lines. They also increase productivity and reduce worker strain by positioning materials at optimum operating heights for worker efficiency.

X Series Lift Tables are available in five capacities, four table sizes and single or double scissors.

All Bishamon Lift Tables are designed and constructed for lifting applications under the toughest working conditions, offering years of trouble-free operation.

Bishamon

Bishamon Industries Corporation

5651 East Francis Street Ontario, California 91761-3601 (909) 390-0055 • (800) 358-8833 Fax (909) 390-0060












SCISSOR LIFT TABLES

X Series Scissor Lift Table Dimensions

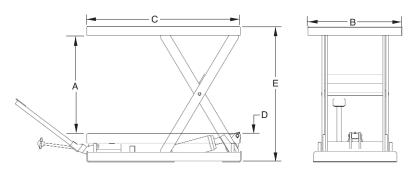

Selector Table for X Series Lift Tables									
Model	Travel (inches) (A)	Capacity (pounds)	Table Size (Inches) (B) X (C)	Height (Lowered (D)	Inches) Raised (E)	Strokes To Max. Height C Models		e Time onds) Unloaded	Ship Weight (pounds)
X-20C	16.0	440	19.5 x 25.5	5.00	21.00	28	-	-	121
X-25C	22.0	550	19.5 x 32.0	5.00	28.00	42	-	-	157
X-25E	22.0	550	19.5 x 32.0	6.00	28.00	-	9	9	190
X-25P	22.0	550	19.5 x 32.0	6.00	28.00	-	36	-	190
X-50C	25.5	1,100	20.0 x 40.0	6.00	31.50	46	-	-	253
X-50E	25.5	1,100	20.0 x 40.0	6.00	31.50	-	12	10	285
X-50P	25.5	1,100	20.0 x 40.0	6.00	31.50	-	40	-	285
X-75C	25.5	1,650	20.0 x 40.0	6.00	31.50	67	-	-	256
X-75E	25.5	1,650	20.0 x 40.0	6.00	31.50	-	17	14	288
X-75P	25.5	1,650	20.0 x 40.0	6.00	31.50	-	58	-	288
X-30SC	45.0	660	20.0 x 40.0	9.25	54.25	54	-	-	315
X-30SE	45.0	660	20.0 x 40.0	9.25	54.25	-	14	11	345
X-30SP	45.0	660	20.0 x 40.0	9.25	54.25	-	47	-	345
X-50SE	25.5	1,100	18.0 x 25.5	8.25	33.75	-	14	11	235
X-50SP	25.5	1,100	18.0 x 25.5	8.25	33.75	-	47	-	235

- C Manual Foot Pedal Pump E Electric / Hydraulic 115V, 1/2HP external power unit assembly with 24VAC control voltage
- P Air / Hydraulic
- S Double Scissors
- Optional foot pedal switch available on electric models.



Removable & storable operator's foot pedal and lowering control on basic models.



Superior hydraulic systems proven on a range of Bishamon lift products

DISTRIBUTED BY:

Working Harder To Make Your Life Easier

Standard Features

- · Compact design
- Manual, electric and air operated models available
- · Constructed with heavy-gauge steel and sturdy welds throughout
- Steel work platforms
- Entrapped rollers for increased stability
- · Superior hydraulic systems proven on a range of Bishamon lift products
- · Hand control on electric models
- · Removable & storable operator's foot pedal and lowering control on manual models
- · Wide range of table sizes
- · Quality baked enamel finish



5651 East Francis Street Ontario, California 91761-3601 (909) 390-0055 • (800) 358-8833 Fax (909) 390-0060

EZ UP®





Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at: 800-358-8833.

Bishamon

Bishamon Industries Corporation

5651 East Francis Street Ontario, California 91761-3601

PH: 800-358-8833 US & Canada 909-390-0055 Outside US/CN

Fax: 800-700-0492













Working Harder To Make Your Life Easier

28 in. (711 mm) 29.6 in. (752 mm) EXTENDED HT. 9.6 in. (245 mm) COLLAPSED HT. 24 5/16 in. (617 mm)

STENDED HT. (1245 mm) ## STENDED HT. (12

24 5/16 in. (617 mm)

Selector Table for EZU Series Pallet Positioners									
Model	Travel (inches)	Capa @ 90 PSI	ocity @100 PSI	Height (Inches) Lowered Raised		Standard Platform Size (inches)	Ship Weight		
EZU-15-R	20	1,500 lbs.	1,700 lbs.	10.4	30.4	43 diameter	525		
EZU-15	20	1,500 lbs.	1,700 lbs.	9.6	29.6	28 x 48	480		
EZU-15-R-SS*	20	1,500 lbs.	1,700 lbs.	10.4	30.4	43 diameter	525		

^{*} Stainless steel model for washdown and clean room applications All accessories are field installable



EZU-15-R With Optional Valve Stand

DISTRIBUTED BY:

Standard Features

- Firestone Airstroke Actuator raises and lowers the table platform to vertically position the load to the desired height
- · Hand or foot control is standard
- Durable and attractive polyester powder coating adds life and superior corrosion resistance to the finish
- Heavy-duty structural steel construction with rugged base frame
- Entrapped rollers on base and platform for added stability
- · Hinged maintenance bars
- Rotating models feature a secured center pivot with ball bearing that provides smooth, even rotation
- High quality 3 position hand lever control allows easy operation
- Clean design with minimum of maintenance needed
- · Easily relocated with a fork truck

Optional Accessories

- Rotator Ring Brake
- Accordion Bellows Skirting
- Semi-Live Portability
- Rotating Platform Solid Rectangular 44x44 / 44x48 / 48x48
- Pedistal Valve Stand for Hand Control





Bishamon Industries Corporation

5651 East Francis Street
Ontario, California 91761-3601

PH: 800-358-8833 US & Canada 909-390-0055 Outside US/CN

Fax: 800-700-0492

LoProfile[®]

LX SERIES LO-PROFILE LIFT TABLES







Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at 800-358-8833.

The Bishamon LX-Series Lo-Profile™ are rugged electrohydraulic lift tables. They are designed for capacities of 550 lbs. to 4,400 lbs. and are available in a variety of platform sizes and lift heights.

LoProfile™ lift tables provide lifting power from a very low elevation. This low collapsed height provides easy access for pallet jacks, 4 - wheeled carts and other devices requiring low profile. The LoProfile™ is also an excellent choice for conveyor transfer.

LoProfile™ lift tables help increase productivity and reduce worker strain by positioning materials at a convenient operating height for worker efficiency.

LoProfile™ lift tables are widely used in production facilities, assembly areas, shipping and warehousing facilities. With great emphasis being placed on ergonomics and the reduction of repetitive motions, the LX Series meets the evergrowing need for work positioning assistance in manufacturing operations.

All Bishamon products are designed and constructed for positioning applications under the toughest working conditions, offering years of trouble-free operation. They reflect over 55 years of proven Bishamon performance.

Bishamon

Bishamon Industries Corporation

5651 East Francis Street Ontario, California 91761-3601 (909) 390-0055 • (800) 358-8833 Fax (909) 390-0060















Working Harder To Make Your Life Easier

LoProfile LX Series





Selector Table for LX Series Lift Tables									
Model	Capacity (lbs.)	Table (in.) W x L (A) (B)	Table Height (in.) Min. Max. (C) (D)		Power Units (see notes)	Units Up Do		Ship Weight (Ibs.)	
LX-25S	550	23.5 x 32.5	2.9	20.9	1/2 HP / 115V	7	5	213	
LX-25L	550	23.5 x 40.0	2.9	30.0	1/2 HP / 115V	10	8	257	
LX-50S	1,100	23.5 x 32.5	2.9	20.9	1/2 HP / 115V	13	8	228	
LX-50L	1,100	23.5 x 40.0	2.9	30.0	1/2 HP / 115V	20	10	277	
LX-100W	2,200	34.5 x 51.0	3.3	38.6	E / 1 / 3 / 3-480*	11	15	606	
LX-100N	2,200	24.0 x 51.0	3.3	38.6	E / 1 / 3 / 3-480*	11	14	490	
LX-200WM	4,400	45.5 x 61.5	4.3	39.4	E / 1 / 3 / 3-480*	23	36	1,100	
LX-200N	4,400	33.5 x 55.5	4.3	39.4	E / 1 / 3 / 3-480*	23	36	860	
LX-200WL	4,400	45.5 x 81.0	4.3	39.4	E / 1 / 3 / 3-480*	23	36	1,238	

- * E = 1 HP / 115V (115V motors increase up time up to 50%)
- *1 = 1 HP / 230V / 1 PHASE
- *3 = 1 HP / 230V / 3 PHASE
- *3-480 = 1 HP / 480V / 3 PHASE



Full Perimeter Electric Toeguard



2.9" Lowered Height On Models Up To 1,100lbs

DISTRIBUTED BY:



Remote Power Unit

Standard Features

- Extremely low collapsed heights of 2.9" to 4.3" provides access for rolling products, carts or pallet trucks
- Electric full-perimeter toeguard around the platform provides optimum operator safety
- Heavy-duty construction with captured scissor rollers for maximum stability
- Remote power unit with hand held control
- 24V operator control voltage
- High performance external electrichydraulic power unit
- Durable steel braided hydraulic hose

Optional Accessories

- · Foot operated control with guard
- · Approach ramp
- · Pallet truck approach ramp



Bishamon Industries Corporation

5651 East Francis Street Ontario, California 91761-3601 (909) 390-0055 • (800) 358-8833 Fax (909) 390-0060